

SL



**The Lightweight Laminator
Solventless**



C

KYMC



■ Automated and Easy-to-Use

The SL model is a solventless laminator. It offers a comprehensive automation and easy-to-use features to make the operators' life simpler and easier.



Specifications

SL SERIES

Max Machine Speed	m/min ft/min	350 1148
Material Width	mm inch	1100 / 1300 / 1500 43.3 / 51.2 / 59.1
Max Roll Diameter	mm inch	600 / 800 / 1000 / 1200 / 1500 23.6 / 31.5 / 39.4 / 47.2 / 59.1



■ Operation Comfort

- Centralized control and monitoring system with clear structured graphic for easy operation

■ Quick job Change

- Cantilever design sleeve system on coating roller for quick change
- Job memory (recipes) with auto machine pre-setting for coating weight and running tension.

Industrial I4.0

- OPC UA Data Exchange Protocol for communication between devices, machines and enterprise systems (ERP, SCADA, CRM...etc)
- Remote HMI monitoring via mobile devices

Safety

- Compliant with Conformité Européene or Australian Standard
- Certification service available with CSA, NEC and IEC






Application

Aluminum foil, Cellophane, Polyester, PP, Metallized BOPP, PE, Polysterene, Saran, Paper and similar flexible packaging materials.



TECHNICAL DRAWING

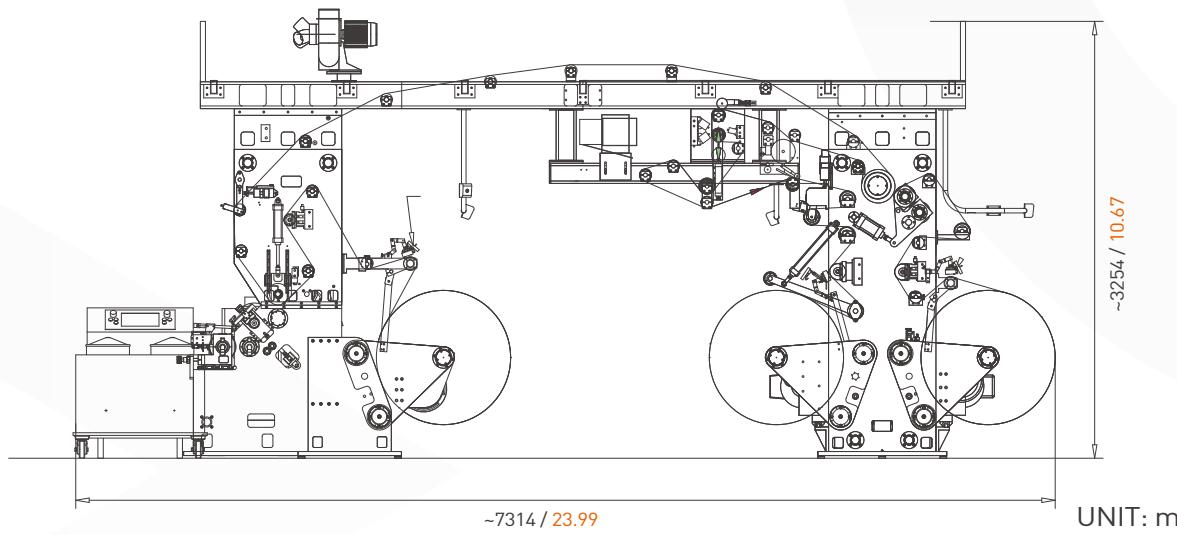

KYMC



KYMC



KUEN YUH MACHINERY
ENGINEERING, CO., LTD.

No.8, Jingke Rd., Nantun Dist., Taichung 408, Taiwan

Tel: +886-4-2359-3830 . 2359-3836 . 2359-38663

Fax: +886-4-2359-3970 . 2350-1242

<https://kymc.com>

Email: info@kymc.com

