

# Smart



## Slitter & Rewinder



C

**KYMC**

## ■ A Modular Design Different Features

Fully automatic tension control with a central winding drive. Smart comes with an edge guide system and a laser guide for core positioning. The operator friendly HMI is linked to the PLC system and provides a job memory function for auto setup. Other modular functions that can be added include trimmed waste rewinder, auto push-off on rewinder, shaftless pickup unwinder, and upgrading to shear knives slitting or laser slitting.



### Specifications

### SMART

Model		Shafted	Shaftless
Max Machine Speed	m/min ft/min	300 984	400 1312
Material Width	mm inch	1300 / 1600 52.2 / 63	
Max Roll Diameter Unwind	mm inch	800 / 1000 31.5 / 39.4	
Max Roll Diameter Rewind	mm inch	600 / 800 23.6 / 31.5	

Smart

## Operation Comfort

- User friendly layout screen
- Automatic tension control
- Web guiding system (edge / line guide)

## Quick job Change

- Job memory function

## Safety


- Compliant with Conformité Européene or Australian Standard or OSHA



Smart

## Application

PP, PET, HDPE, LDPE, Plastic films, Paper and laminated

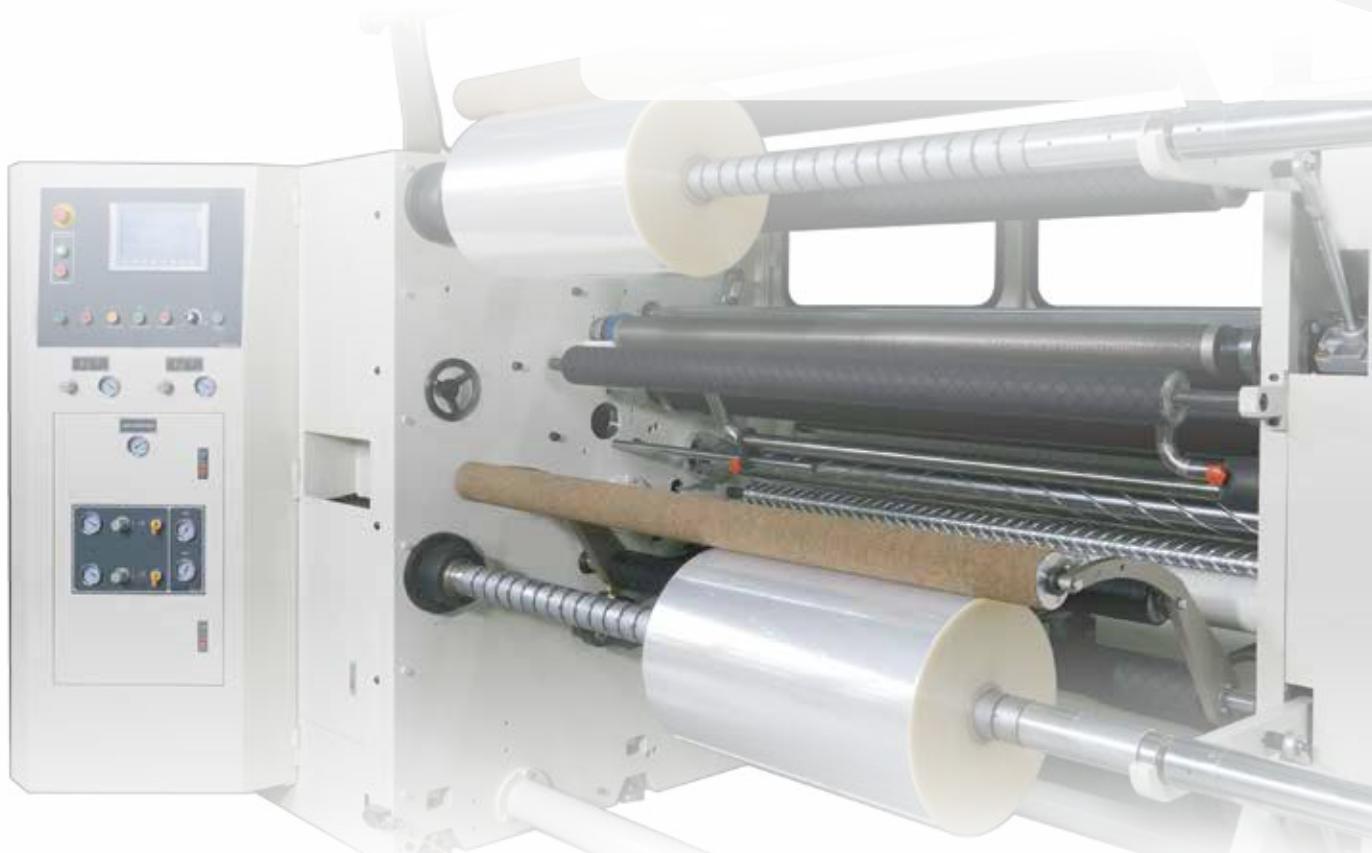

**KYMC**



KUEN YUH MACHINERY  
ENGINEERING, CO., LTD.

No.8, Jingke Rd., Nantun Dist., Taichung 408, Taiwan

Tel: +886-4-2359-3830 . 2359-3836 . 2359-38663

Fax: +886-4-2359-3970 . 2350-1242

<https://kymc.com>

Email: [info@kymc.com](mailto:info@kymc.com)

